

POLYESTER CAPACITORS


APPLICATIONS:

These capacitors are designed to use in glow starts of fluorescent lamps for sparking suppression.




TECHNICAL DATA:

- Climatic category: - **55/085/21**
- Electric strength of insulation at ac. Voltage 50Hz, 60s:
 - between terminals - 1500 Vac
 - between terminals and case - 2000 Vac
- Dissipation factor : - 0,01 at f=1000Hz
- Insulation resistance R_{iz} at +20°C: - 7500 M
- Switching ability at 1250VAC: - 50 000 cycles
- Specifications: **ZN-91/MP/MIFLEX/05**

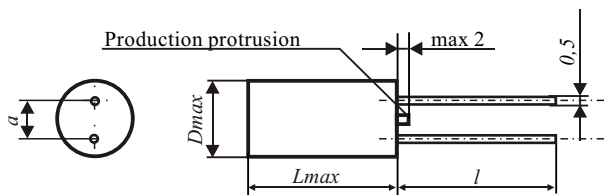

Version 1÷6

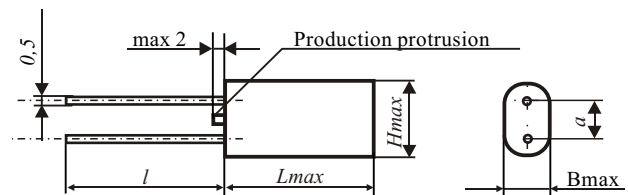

Version 7÷8

Version	Capacitance e	Tolerance	Voltage	Dimensions				
				Bmax	Hmax/Dmax	Lmax	l	a
				mm				
1	8 000	+30/-10	250	-	7	26	16±1	4,5±0,5
2	5 000	+30/0		-	6		16±1	4,5±0,5
3	5 600	+30/-10		-	6		16±1	4,5±0,5
4	6 000	+30/-10		-	6,5		16±1	4,5±0,5
5	5 000	+30/0		-	6		21±1	4,5±0,5
6	3 300	+20/-10		-	4,7		16±1	2,5±0,5
7	5 000	+30/0		4,8	7,5	16±1	5±1,5	
8	8 000	+30/-10		5,5	8,5	16±1	5±1,5	



MIFLEX-RELAX Sp. z o.o.

99-300 KUTNO UL. GRUNWALDZKA 3

Tel. (0-24) 355 13 34

Fax. (0-24) 253 64 67

<http://www.miflexrelax.com.pl>

E-mail: miflexrelax@home.pl

Revision date: 2002.07.24